


101-790  
104-270/A

01/16/98

U.S. PATENT AND TRADEMARK OFFICE  
WASHINGTON, D.C. 20231

TRANSMITTED HERewith FOR FILING IS A  
U.S. PATENT APPLICATION FOR:

Inventor(s): Kunio SAWAI, Hiroshi HAMAHATA, Shigeru  
KANEKO and Katsunori ONISHI  
Title: LOADING MECHANISM IN VIDEO CASSETTE  
DECK  
Attorney Docket No.: P-98F2

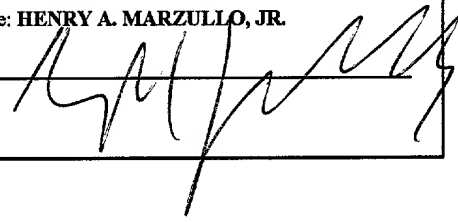**Certificate of Mailing By "Express Mail"**  
"Express Mail" Mailing Label No. EM248830943US  
Date of Deposit: **January 16, 1998**  
I hereby certify that this paper or fee is being deposited with  
the United States Postal Service as "Express Mail Post Office  
to Addressee" under 37 C.F.R. § 1.10 on the date indicated  
above and is addressed to the Commissioner of Patents and  
Trademarks, Washington, D.C. 20231.  
Print Name: **HENRY A. MARZULLO, JR.**  
Signature: 

Enclosed are:

- ☒ Specification, claims, Abstract
- ☒ 7 sheet(s) of drawings
- ☒ X FORMAL     INFORMAL
- ☐ An Assignment of the Invention will follow.
- ☒ A Declaration and Power of Attorney (signed Declaration will follow)
- ☐ A Verified Statement to establish small entity status under 37 CFR 1.9 and 34 CFR 1.27 (will follow)
- ☒ Priority is claimed on the basis of Japanese Patent Application No. Hei. 9-000136 filed January 17, 1997 (document to follow). ☐ ENCLOSED ☒ NOT ENCLOSED.

The filing fee has been calculated as shown below:

FOR	NO. FILED	NO. EXTRA
Basic Fee		
Total Claims	4 - 20 =	0
Indep Claims	1 - 1 =	0
<input type="checkbox"/> Multiple Dependent Claim Presented		

SMALL ENTITY	
RATE	FEE
	\$
11.00	\$ ----
41.00	\$ ----
	\$
TOTAL	\$


or  
or  
or  
or  
or  
or  
or

LARGE ENTITY	
RATE	FEE
	\$ 790.00
22.00	\$ ----
82.00	\$ ----
	\$
TOTAL	\$ 790.00

- ☐ Please charge my Deposit Account No. 10-0100 in the amount of \$ .  
A duplicate copy of this sheet is enclosed.
- ☒ A check in the amount of \$790.00 to cover the filing fee is enclosed.  
\*Check includes \$                      assignment recording fee.
- ☒ The Commissioner is hereby authorized to charge payment of the fees associated with this communication and during the pendency of this application, such as an extension or issue fee if mistakenly not paid or insufficient, and/or any other fee due but not paid by check, etc., or credit any overpayment to Deposit Account No. 10-0100. A duplicate copy of this sheet is enclosed.

Dated: **January 16, 1998**  
One Chase Road  
Scarsdale, NY 10583  
(914) 723-4300

**LACKENBACH SIEGEL MARZULLO  
ARONSON & GREENSPAN, P.C.**

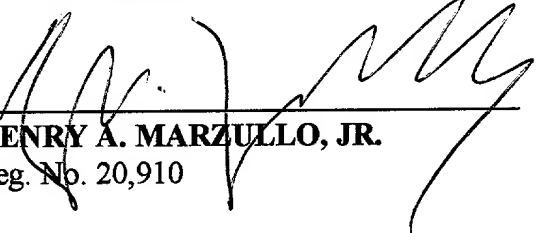BY:   
**HENRY A. MARZULLO, JR.**  
Reg. No. 20,910

Enclosed for filing under X 35 USC 111 or     35 USC 371

# LOADING MECHANISM IN VIDEO CASSETTE DECK

## BACKGROUND OF THE INVENTION

The present invention relates to a loading mechanism in a video cassette deck.

A conventional loading mechanism in a video cassette deck has a door for opening/closing a cassette insertion port provided in the front of a deck body, a cassette receiving portion movable between an initial location facing the cassette insertion port and a running location where a video cassette tape is made to run, and a cassette moving mechanism for moving the cassette receiving portion between the initial location and the running location.

The cassette moving mechanism has a pair of wall portions provided on both left and right sides of the cassette receiving portion, a slide arm attached on one of these wall portions horizontally slidably, a driving portion for sliding the slide arm, a cassette driving gear which is rotatably supported on the wall portion on which the slide arm is attached and which is connected to the cassette receiving portion through a groove portion formed in the wall portion, and a door arm for transmitting the motion of the slide arm to the door.

When the cassette receiving portion in the running location is moved to the initial location, that is, when a video cassette tape is ejected, the door is opened by using the movement of the cassette receiving portion from the running location to the initial location.

The running location of the cassette receiving portion is deeper and lower than the initial location. It is therefore necessary to first move up the cassette receiving portion when the cassette receiving portion is to be moved

from the running location to the initial location. The rotation of the cassette driving gear for moving up the cassette receiving portion is transmitted to the door arm to thereby make the door open. Then, the door is opened toward the inside.

The above-mentioned conventional loading mechanism in a video cassette deck has, however, the following problem.

That is, since two operations, that is, moving up the cassette receiving portion in the running location and opening the door toward the inside are performed at the same time, it is required to provide a horizontal gap  $G$  between an opening fulcrum 521 of a door 520 and a front edge portion of a video cassette tape 400 such that the gap  $G$  has at least a height corresponding to the height of the door, as shown in Fig. 7, so that the video cassette tape 400 set in the cassette receiving portion and the door 520 located in the middle of opening operation should not interfere with each other.

It is therefore necessary to move the video cassette tape horizontally from the initial location at least to the extent of a depth corresponding to the depth of the video cassette tape.

On the other hand, recently, video cassette decks have been miniaturized by reconsidering the arrangement of parts and the mechanisms of respective portions, but it is required to provide a depth corresponding to the horizontal movement of a vide cassette tape for loading. In other words, when the quantity of horizontal movement of a vide cassette tape for loading is reduced, the depth of the video cassette deck can be also reduced.

## SUMMARY OF THE INVENTION

Paying attention to this point of view, an object of the present invention is to provide a loading mechanism in a video cassette deck in which the quantity of horizontal movement of a video cassette tape for loading is reduced to thereby reduce the depth of the video cassette deck.

The loading mechanism in a video cassette deck according to the present invention comprises a door for opening and closing a cassette insertion port provided in the front of a deck body, a cassette receiving portion movable between an initial location facing the cassette insertion port and a running location in which a video cassette tape is made to run, and a cassette moving mechanism for moving the cassette receiving portion between the initial location and the running location, the cassette moving mechanism including a pair of wall portions provided on both the left and right sides of the cassette receiving portion, a slide arm attached on one of the wall portions horizontally slidably, a driving portion for making the slide arm slide, a cassette driving gear which is rotatably supported on the one wall portion on which the slide arm is attached and which is connected to the cassette receiving portion through a groove portion formed in the one wall portion, and a door arm for transmitting the motion of the slide arm to the door, the door being opened before the cassette receiving portion is moved when the cassette receiving portion is moved to the initial location.

## BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic side view of a loading mechanism in a video cassette deck according to an embodiment of the present invention, in which a

cassette receiving portion is in an initial location;

Fig. 2 is a schematic side view of the loading mechanism in a video cassette deck according to the embodiment of the present invention, in which the cassette receiving portion is in a running location;

Fig. 3 is a schematic side view of the loading mechanism in a video cassette deck according to the embodiment of the present invention, in which a slide arm is in an eject ready position;

Fig. 4 is a schematic side view of the loading mechanism in a video cassette deck according to the embodiment of the present invention, in which the cassette receiving portion is in a position between the initial location and the running location;

Fig. 5 is a schematic perspective view of a video cassette deck;

Fig. 6 is a schematic side view showing the effect of the loading mechanism in a video cassette deck according to the embodiment of the present invention; and

Fig. 7 is a schematic side view showing problems of a loading mechanism in a video cassette deck of the conventional type.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fig. 1 is a schematic side view of a loading mechanism in a video cassette deck according to an embodiment of the present invention, in which a cassette receiving portion is in an initial location. Fig. 2 is a schematic side view of the loading mechanism in a video cassette deck according to the embodiment of the present invention, in which the cassette receiving portion is in a running location. Fig. 3 is a schematic side view of the loading

mechanism in a video cassette deck according to the embodiment of the present invention, in which a slide arm is in an eject ready position. Fig. 4 is a schematic side view of the loading mechanism in a video cassette deck according to the embodiment of the present invention, in which the cassette receiving portion is in a position between its initial location and the running location. Fig. 5 is a schematic perspective view of a video cassette deck. Fig. 6 is a schematic side view showing the effect of the loading mechanism in a video cassette deck according to the embodiment of the present invention.

A loading mechanism in a video cassette deck according to an embodiment of the present invention has a door 520 for opening/closing a cassette insertion port 510 provided in the front of a deck body 500, a cassette receiving portion 200 movable between an initial location P1 facing the cassette insertion port 510 and a running location P2 where a video cassette tape 400 is made to run, and a cassette moving mechanism 100 for moving the cassette receiving portion 200 between the initial location P1 and the running location P2. The characteristic of the loading mechanism is in the motion of the door 520 when the video cassette tape 400 in the running location P2 is ejected.

The term in this specification will be defined first before the detail description of the configuration of the respective portions. The initial location P1 means a position where the cassette receiving portion 200 faces the cassette insertion port 510, that is, a position where the cassette receiving portion 200 is located in the case where the video cassette tape 400 has not been loaded. In addition, the running location P2 means a position where the cassette receiving portion 200 is located in the case where reproducing, recording, etc. are performed on the video cassette tape 400.

On the other hand, the position of the slide arm 120 in the case where the cassette receiving portion 200 is in the running location P2 is referred to as a running position PB. In addition, the position of the slide arm 120 in the case where the cassette receiving portion 200 is in the initial location P1 is referred to as an initial position PA. Further, the position of the slide arm 120 in the case where the cassette receiving portion 200 is in the running location P2 and the door 520 is to be opened is referred to as an eject ready position PC.

First, the cassette insertion port 510 elongated from side to side for insertion and ejection of the video cassette tape 400 is open in the front of the deck body 500. In order to prevent dust from entering the inside, the cassette insertion port 510 is normally closed by the door 520 except when the video cassette tape 400 is inserted or ejected. This door 520 can be opened toward the upper of the inside around shafts (not-shown) formed on the opposite corner portions at the upper end. A door-side nail portion (not-shown) for catching the door arm 140 which will be described later is formed on an end portion of the back of the door 520. Since an arm-side nail portion 142 of the door arm 140 is caught by the door-side nail portion, the door 520 is opened/closed in accordance with the motion of the door arm 140.

In addition, the cassette receiving portion 200 into which the video cassette tape 400 will be loaded has a bottom plate, side plates provided to stand on the left and right sides of the bottom plate, a shaft laid between the side plates, and pinions 220 attached on the opposite ends of this shaft. The cassette receiving portion 200 can move between the initial location P1 where the cassette insertion port 510 faces and the running location P2 where the

video cassette tape 400 is made to run.

Further, the cassette moving mechanism 100 for moving the cassette receiving portion 200 between the initial location P1 and the running location P2 has a pair of wall portions 110 provided on both left and right sides of the cassette receiving portion 200, a slide arm 120 attached on one of the wall portions 110 horizontally slidably, a driving portion (not-shown) for sliding this slide arm 120, a cassette driving gear 130 which is rotatably supported on the wall portion 110 on which the slide arm 120 is attached and which is connected to the cassette receiving portion 200 through a groove portion 112 formed in the wall portion 110, and a door arm 140 for transmitting the motion of the slide arm 120 to the door 520.

The pinion 220 of the cassette receiving portion 200 gears with gears of geared groove portions 113 formed in the above-mentioned pair of wall portions 110 respectively. These geared groove portions 113 are extended horizontally from the initial location P1 toward the deep side, bent by 90 degrees in the running location P2, and extended downward therefrom. Therefore, in the case where the cassette receiving portion 200 is to move from the initial location P1 to the running location P2, the cassette receiving portion 200 moves from the initial location P1 toward the deep side, and then goes down toward the running location when the cassette receiving portion 200 reaches the running location P2. Although in each of these geared groove portions 113, one gear is formed at the upper edge portion of the horizontal portion while another gear is formed on the right side in the vertical portion in the drawing, the gears being not shown in the drawings.

On the other hand, another groove portion 112 is formed in the wall



portion 110. This groove portion 112 is shaped similarly to the geared groove portion 113, and positioned on this side and lower side of the geared groove portion 113. This groove portion 112 is made parallel with the geared groove portion 113 at the portions corresponding to the groove portion 113.

In addition, the slide arm 120 constituting the cassette moving mechanism 100 is attached horizontally slidably on one of the wall portions 110. This slide arm 120 is a member for managing almost all of the operations of this loading mechanism in a video cassette deck, and it is made to slide by a not-shown driving portion. A predetermined rack portion 121 is formed in the front end portion of the slide arm 120. This rack portion 121 gears with the pinion portion 131 of the cassette driving gear 130, which will be described later, so as to constitute a gear mechanism 150 for transmitting the respective motions of the side arm 120 and the cassette driving gear 130 to each other. In addition, a lock portion 122 is formed on the slide arm 120 at a position deeper than the rack portion 121 so that a tooth portion 131A disposed on the deepest side of the rack portion 131 is caught by the lock portion 122 when the slide arm 120 is in the running position PB.

Further, a cam plate 123 in which a cam 123A for managing the motion of the door arm 140 is provided inside is formed in a side surface portion on the front end side of this slide arm 120. The cam 123A formed in this cam plate 123 is to move the door arm 140 between an open position to open the door 520 and a close position to close the door 520. Further, the case 123A is formed in a valley-like shape so that its center portion is made low and its opposite ends are made high, as shown in Figs. 1 to 4 by means of one-dot chain line.

03003174 01693  
35970" 4280060

The door arm 140 the motion of which is managed by this cam 123A is rotatably supported through a fulcrum 141 on the wall portion 110 on which the slide arm 140 is attached. On the front end of this door arm 140, an arm-side nail portion 142 is provided so as to extend laterally to be caught by the door-side nail portion of the door 520.

In addition, on the base end side of this door arm 140 (in the view from the fulcrum 141, the opposite side to the side where the arm-side nail portion 142 is provided), a pin 143 as a cam follower corresponding to the cam 123A is projecting toward the outside. This pin 143 plays a role to transmit the motion of the slide arm 120 to the door arm 140. The front end side of this door arm 140 enters a slit 111 formed in the wall portion 110 so that the motion of the door arm 140 is guided by this slit 111.

The cassette driving gear 130 is rotatably supported on the wall portion 110 on which the slide arm 120 is attached, and connected to the cassette receiving portion 200 through the groove portion 112 formed in the wall portion 110. The connection between the cassette driving gear 130 and the cassette receiving portion 200 is attained by the engagement of the pin 210 which projects from the side plate of the cassette receiving portion 200 toward the outside, with an approximately L-shaped engagement groove 132 which is provided in the cassette driving gear 130. Accordingly, the rotation of the cassette driving gear 130 is transmitted to the cassette receiving portion 200 through the pin 210, so that the cassette receiving portion 200 moves under the guidance of the groove portion 112.

The pinion portion 131 with its rotation center 133 is formed in the cassette driving gear 130. The pinion portion 131 gears with the rack portion

121 of the slide arm 120 so as to constitute a gear mechanism 150, as mentioned above.

In addition, the gear mechanism 150 has such a feature as follows. First, when the slide arm 120 has advanced toward the front of the deck body 500, that is, when the cassette receiving portion 200 is in the running location P2, that is, when the slide arm 120 is in the running position PB, the pinion portion 131 and the rack portion 121 do not gear with each other.

Next, the operation and effect of the thus configured loading mechanism in a video cassette deck will be described.

First, the operation of the cassette receiving portion 200 from the initial location P1 to the running location P2 will be described. When the cassette receiving portion 200 is in the initial location P1, the cassette moving mechanism 100 is in such a state as shown in Fig. 1. That is, the slide arm 120 is disposed in the deepest side of the deck body 500, and the pinion portion 131 of the cassette driving gear 130 constituting the gear mechanism 150 gears with the front end portion of the rack portion 121 of the slide arm 120. That is, the slide arm 120 is in the initial position PA.

In addition, the pin 143 of the door arm 140 is not in contact with the cam 123A because the slide arm 120 is on the deepest side. Accordingly, the cassette insertion port 510 is closed by the door 520. However, since the door arm 140 is in a free state, the door 520 can be opened naturally if an external force is given thereto.

The video cassette tape 400 is loaded into the cassette receiving portion 200 which is in the initial location P1. That is, the video cassette tape 400 is inserted into the inside through the cassette insertion port 510 while

pushing the door 520 away. Then, a not-shown switch is turned on by the video cassette tape 400. As a result, a not-shown driving mechanism constituting the cassette moving mechanism 100 starts driving, so that the slide arm 120 starts sliding to this side. That is, the slide arm 120 starts to move to the running position PB (see Fig. 4).

By the insertion of the video cassette tape 400 into the cassette receiving portion 200, a lock mechanism (not-shown) is released from locking the cassette receiving portion 200 in the initial location P1.

By the sliding of the slide arm 120 to this side, the cassette driving gear 130 starts to rotate in the direction of arrow A shown in Fig. 1. By this rotation, the cassette receiving portion 200 receives a force from the driving portion, and starts to move from the initial location P1 toward the running location P2. This movement of the cassette receiving portion 200 is guided by the geared groove portion 113 and the groove portion 112. Having reached a position above the running location P2, the cassette receiving portion 200 moved down toward the running location P2.

As shown in Fig. 4, the pin 143 of the door arm 140 slips under the cam 123A immediately before the cassette receiving portion 200 reaches above the running location P2. That is, the sliding movement of the slide arm 120 is transmitted to the door arm 140 by the cam 123A. In this state, the door 520 continues its opened state because the pin 143 of the door arm 140 is located under the cam 123A.

The slide arm 120 continues to slide to this side so that the cassette receiving portion 200 moves to the running location P2. Even if the cassette receiving portion 200 reaches the running location P2, the slide arm 120

continues to move to this side as shown in Fig. 3. That is, the slide arm 120 continues to slide to this side till the pin 143 comes off from the cam 123A.

If the pin 143 comes off from the cam 123A as shown in Fig. 2, the door arm 140 becomes free. Accordingly, the door 520 closes the cassette insertion port 510 spontaneously by its own weight.

That is, the pin 143 comes off from the cam 123A as shown in Fig. 2, and then the rack portion 121 of the slide arm 120 and the pinion portion 131 of the cassette driving gear 130, which constitute the gear mechanism 150, are released from gearing with each other. In addition, the tooth portion 131A on the deepest side of the pinion portion 131 is caught by the lock portion 122 formed in the slide arm 120. Consequently, the cassette receiving portion 200 reaches the running location P2, and the slide arm 200 arrives at the running position PB.

Next, the operation of the cassette receiving portion 200 from the running location P2 to the initial location P1 will be described.

When the cassette receiving portion 200 is in the running location P2, the respective portions of the cassette moving mechanism 100 are in such a state as shown in Fig. 2. When a cassette eject switch (not shown) is operated in this state, a not-shown driving portion constituting the cassette moving mechanism 100 is driven in the opposite direction to the previous direction. By the driving of this driving portion, the slide arm 120 in the running position PB slides to the initial position PA through the eject ready position PC. That is, in the view from the cassette receiving portion 200, the cassette receiving portion 200 in the running location P2 moves to the initial location P1.

When the slide arm 120 in the running position PB starts to slide to



weight.

The loading mechanism in a video cassette deck according to the present invention comprises a door for opening and closing a cassette insertion port provided in the front of a deck body, a cassette receiving portion movable between an initial location facing the cassette insertion port and a running location in which a video cassette tape is made to run, and a cassette moving mechanism for moving the cassette receiving portion between the initial location and the running location, the cassette moving mechanism including a pair of wall portions provided on both the left and right sides of the cassette receiving portion, a slide arm attached on one of the wall portions horizontally slidably, a driving portion for making the slide arm slide, a cassette driving gear which is rotatably supported on the one wall portion on which the slide arm is attached and which is connected to the cassette receiving portion through a groove portion formed in the one wall portion, and a door arm for transmitting the motion of the slide arm to the door; the door being opened before the cassette receiving portion is moved when the cassette receiving portion is moved to the initial location, and is characterized in that when it is defined so that the slide arm is in a running position in the case where the cassette receiving portion is in the running location, the slide arm is in its initial position in the case where the cassette receiving portion is in the initial location, and the slide arm is in its eject ready position in the case where the cassette receiving portion is in the running location and the door is opened, the slide arm and the cassette driving gear have a gear mechanism for transmitting the motion of each of the slide arm and the cassette driving gear to each other, and the gear mechanism starts to move the cassette receiving

portion from the running location toward the initial location after the slide arm has moved from the running position to the eject ready position.

Accordingly, in this loading mechanism in a video cassette deck, when the video cassette tape in the running location is ejected, the door is opened before the cassette receiving portion, that is, the video cassette tape starts to be returned to the initial location. Accordingly, even if the door is made close to the running location, there is no fear that the operation of opening the door and the operation of returning the video cassette tape from the running location to the initial location interfere with each other. Specifically, as shown in Fig. 6, since the video cassette tape 400 and the door 520 in the middle of the opening operation do not interfere with each other, it is not necessary to provide a horizontal gap G between the opening fulcrum 521 of the door 520 and the front edge portion of the video cassette tape 400 so as to have a height corresponding to the height of the door 520, as shown in the conventional mechanism of Fig. 7. Accordingly, it is possible to reduce the horizontal movement of the video cassette tape by an amount corresponding to a value  $a$  shown in Fig. 6. Accordingly, it is possible to reduce the depth of the video cassette deck at least by the amount corresponding to the value  $a$  shown in Fig. 6, in comparison with the depth of the conventional video cassette tape.

Furthermore, according to the loading mechanism in a video cassette deck as stated, the slide arm is provided with a cam for moving the door arm between an open position to open the door and a close position to close the door, so that the cam moves the door arm from the close position to the open position while the slide arm slides from the running position to the eject ready position. By such a configuration, the door can be opened while the cassette receiving



portion is left as it is in the running location.

Further, in the loading mechanism in a video cassette deck, the gear mechanism is constituted by a rack portion formed in the slide arm, and a pinion portion formed in the cassette driving gear so as to gear with the rack portion, and the rack portion and the pinion portion do not gear with each other when the slide arm is in a position between the running position and the eject ready position. It is therefore possible to keep the cassette receiving portion in the running location surely when the slide arm is in a position between the running position and the eject ready position.

WHAT IS CLAIMED IS:

1. A loading mechanism in a video cassette deck comprising a door for opening and closing a cassette insertion port provided in the front of a deck body, a cassette receiving portion movable between an initial location facing said cassette insertion port and a running location in which a video cassette tape is made to run, and a cassette moving mechanism for moving said cassette receiving portion between said initial location and said running location, said cassette moving mechanism including a pair of wall portions provided on both the left and right sides of said cassette receiving portion, a slide arm attached on one of said wall portions horizontally slidably, a driving portion for making said slide arm slide, a cassette driving gear which is rotatably supported on said one wall portion on which said slide arm is attached and which is connected to said cassette receiving portion through a groove portion formed in said one wall portion, and a door arm for transmitting the motion of said slide arm to said door; said door being opened before said cassette receiving portion is moved when said cassette receiving portion is moved to said initial location; characterized in that

when it is defined so that said slide arm is in a running position in the case where said cassette receiving portion is in said running location, said slide arm is in its initial position in the case where said cassette receiving portion is in said initial location, and said slide arm is in its eject ready position in the case where said cassette receiving portion is in said running location and said door is opened,

said slide arm and said cassette driving gear have a gear mechanism for transmitting the motion of each of said slide arm and said cassette driving

gear to each other, and said gear mechanism starts to move said cassette receiving portion from said running location toward said initial location after said slide arm has moved from said running position to said eject ready position.

2. A loading mechanism in a video cassette deck according to Claim 1, characterized in that said slide arm is provided with a cam for moving said door arm between an open position to open said door and a close position to close said door, so that said cam moves said door arm from said close position to said open position while said slide arm slides from said running position to said eject ready position.

3. A loading mechanism in a video cassette deck according to Claim 1 or 2, characterized in that said gear mechanism is constituted by a rack portion formed in said slide arm, and a pinion portion formed in said cassette driving gear so as to gear with said rack portion, and said rack portion and said pinion portion do not gear with each other when said slide arm is in a position between said running position and said eject ready position.

## ABSTRACT OF THE DISCLOSURE

A loading mechanism in a video cassette deck comprising a cassette moving mechanism 100 for moving a cassette receiving portion 200 between an initial location and a running location. The cassette moving mechanism 100 has a slide arm 120 horizontally slidably attached on one of a pair of wall portions 110 provided on both left and right sides of the cassette receiving portion 200, a driving portion for sliding the slide arm 120, a cassette driving gear 130 which is rotatably supported on the wall portion 110 to which the slide arm 120 is attached and which is connected to the cassette receiving portion 200 through a groove portion 112 formed in the wall portion 110, and a door arm 140 for transmitting the motion of the slide arm 120 to a door. The cassette loading mechanism is designed so that the door is opened before the cassette receiving portion 200 is moved when the cassette receiving portion 200 in the running location is moved into the initial location.











Fig. 5

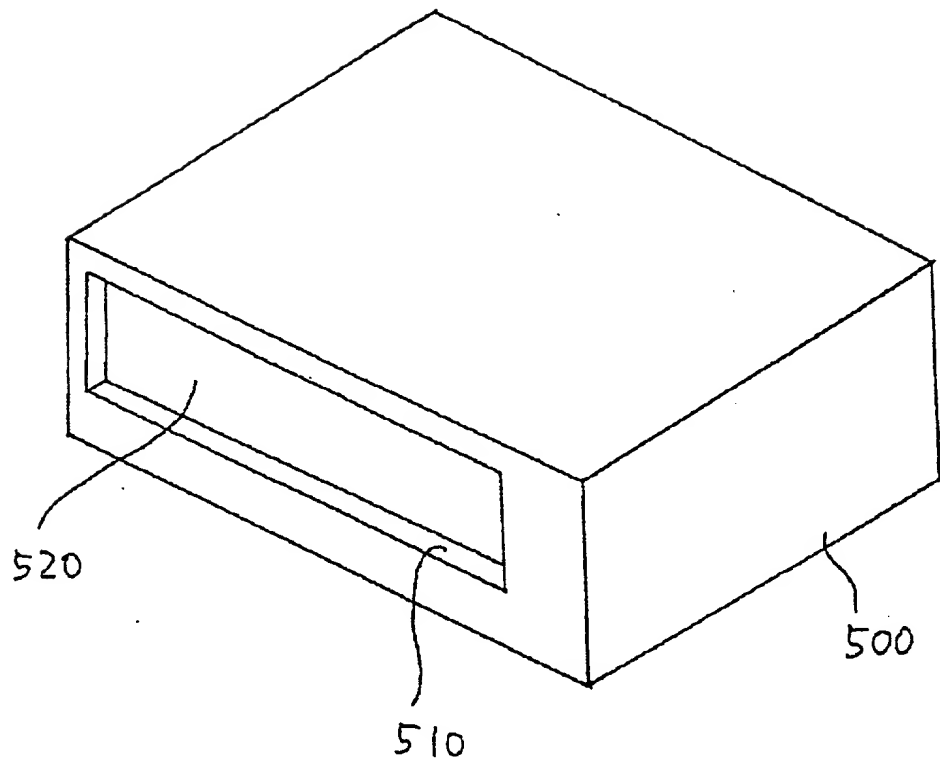


Fig. 6


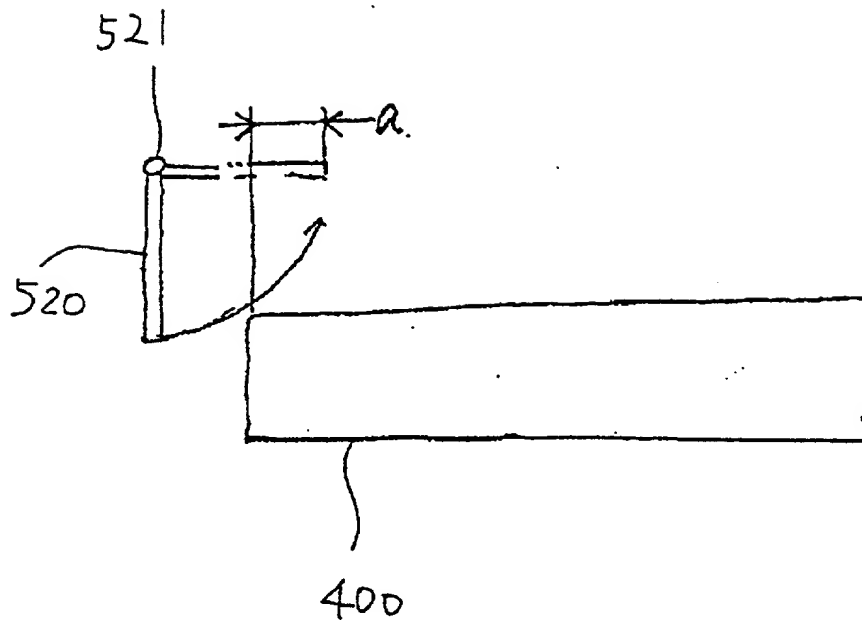


Fig. 7

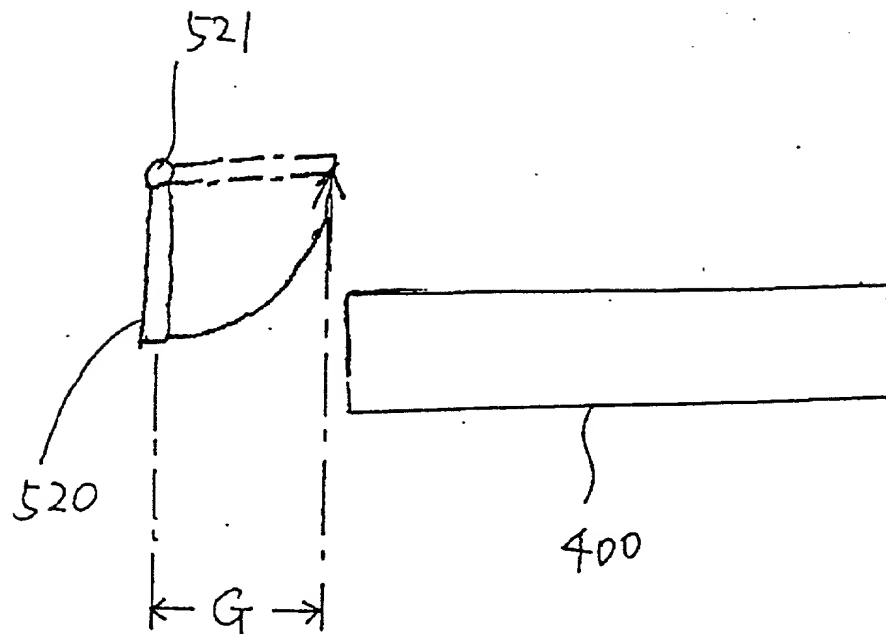

**UNITED STATES -- PATENT  
DECLARATION FOR PATENT APPLICATION**

Attorney's Docket No.: **P-98F2**

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **LOADING MECHANISM IN VIDEO CASSETTE DECK**,

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on \_\_\_\_\_ as

Application Serial No.: \_\_\_\_\_,

and was amended on \_\_\_\_\_.

(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):

Appln. No.	Country	Date Filed	Priority Claimed
Hei. 9-000136	Japan	January 17, 1997	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Appln. Serial No.	Filing Date	Status: Patented, Pending, Abandoned
		<input type="checkbox"/> Patented <input type="checkbox"/> Pending <input type="checkbox"/> Abandoned
		<input type="checkbox"/> Patented <input type="checkbox"/> Pending <input type="checkbox"/> Abandoned
		<input type="checkbox"/> Patented <input type="checkbox"/> Pending <input type="checkbox"/> Abandoned

# POWER OF ATTORNEY

I hereby appoint the following attorney(s) and/or agent(s) to prosecute the application entitled **LOADING MECHANISM IN VIDEO CASSETTE DECK** and to transact all business in the Patent and Trademark Office connected therewith:

HENRY A. MARZULLO, JR., Reg. No. 20,910;  
HOWARD N. ARONSON, Reg. No. 27,302; and  
MYRON GREENSPAN, Reg. No. 25,680.

Address all telephone calls to *Henry A. Marzullo, Jr.*, at telephone number (914) 723-4300, or to the attorney executing the last document.

Address all correspondence to **LACKENBACH SIEGEL MARZULLO ARONSON & GREENSPAN, P.C.**  
at **Penthouse Suite, One Chase Road, Scarsdale, New York 10583 U.S.A.**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First or Sole Inventor <b>Kunio SAWAI</b>	Citizenship <b>JAPAN</b>
RESIDENCE Address – Street <b>c/o Funai Electric Co. Ltd., 7-1, 7-Chome, Nakagaito</b>	POST OFFICE Address – Street <b>(same as residence)</b>
City (Zip) <b>Daito-shi, Osaka</b>	City (Zip)
State or Country <b>JAPAN</b>	State or Country
Date	Signature
Full Name of Second Joint Inventor <b>Hiroshi HAMAHATA</b>	Citizenship <b>JAPAN</b>
RESIDENCE Address – Street <b>c/o Funai Electric Co. Ltd., 7-1, 7-Chome, Nakagaito</b>	POST OFFICE Address – Street <b>(same as residence)</b>
City (Zip) <b>Daito-shi, Osaka</b>	City (Zip)
State or Country <b>JAPAN</b>	State or Country
Date	Signature
Full Name of Third Joint Inventor <b>Shigeru KANEKO</b>	Citizenship <b>JAPAN</b>
RESIDENCE Address – Street <b>c/o Funai Electric Co., Ltd., 71-7-Chome, Nakagaito</b>	POST OFFICE Address – Street <b>(same as residence)</b>
City (Zip) <b>Daito-shi, Osaka</b>	City (Zip)
State or Country <b>JAPAN</b>	State or Country
Date	Signature

☐ Additional inventors are being named on separately numbered sheets attached hereto.

Full Name of Fourth Joint Inventor <b>Katsunori ONISHI</b>	Citizenship <b>JAPAN</b>
RESIDENCE Address -- Street <b>c/o Funai Electric Co. Ltd., 7-1, 7-Chome, Nakagaito</b>	POST OFFICE Address -- Street <b>(same as residence)</b>
City (Zip) <b>Daito-shi, Osaka</b>	City (Zip)
State or Country <b>JAPAN</b>	State or Country
Date	Signature

Full Name of Fifth Joint Inventor	Citizenship
RESIDENCE Address -- Street	POST OFFICE Address -- Street
City (Zip)	City (Zip)
State or Country	State or Country
Date	Signature

Full Name of Sixth Joint Inventor	Citizenship
RESIDENCE Address -- Street	POST OFFICE Address -- Street
City (Zip)	City (Zip)
State or Country	State or Country
Date	Signature

Full Name of Seventh Joint Inventor	Citizenship
RESIDENCE Address -- Street	POST OFFICE Address -- Street
City (Zip)	City (Zip)
State or Country	State or Country
Date	Signature

Full Name of Eighth Joint Inventor	Citizenship
RESIDENCE Address -- Street	POST OFFICE Address -- Street
City (Zip)	City (Zip)
State or Country	State or Country
Date	Signature